




ANNO 1978

for reliable rotation in maintenance and production

# BETEX®

## HYDRAULICAL SPREADERS

**PATENTED  
DESIGN**

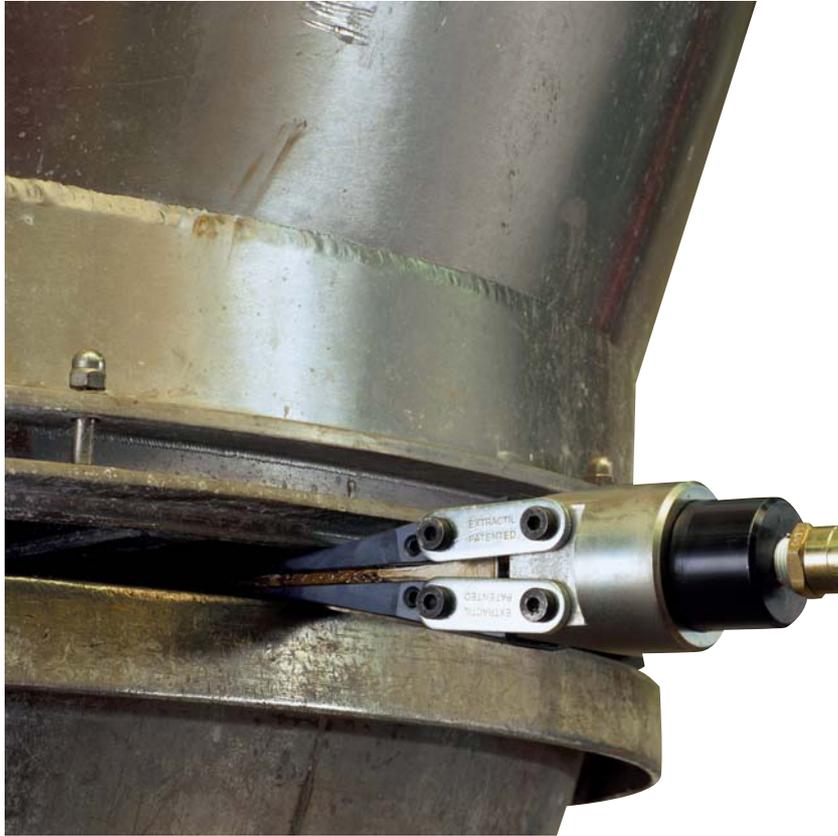

### Loads are lifted perpendicularly!

- Ideal for numerous industrial maintenance repair jobs.
- Accurate height adjustments (for instance shaft alignment) can easily be executed by one person.
- Easy, light and very practical to use. Particularly suitable when available space is very limited.
- Suitable for spaces of 5 to 40 mm.
- Due to the reduced thickness of the jaws, made of high quality hardened steel, these multi-functional wedges can be used for jobs where working space is extremely limited.

15 TLS in action

Various combination sets\* available in handy carrying case, including:

- hydraulic spreader
- 2-stage hand pump
- hose, 1.8 mtr
- pressure gauge
- T-adapter
- male (hose) half coupler
- complete quick coupler

\* see price list



15TLS (lifting and spreading)




10TS (spreading)




10TL (lifting)

**Models:**

Type	Max. cap.	A mm	B mm	L mm	Max. spread mm	Weight kg	Combined pump	Max. pressure bar
<b>Lifting and spreading, two-in-one model</b>								
15 TLS	15 t	5	40	235	10	4	single-acting	700
25 TLS	25 t	7	40	330	16	8	double-acting	700
30 TLS	30 t	8	40	330	24	7.5	double-acting	700
<b>Model lifting</b>								
10 TL	10 t	7	35	235	17	3	single-acting	700
20 TL	20 t	8	35	255	23	4.5	single-acting	700
<b>Model spreading</b>								
10 TS	10 t	7	35	235	17	3	single-acting	700
20 TS	20 t	8	40	255	23	4.5	single-acting	700

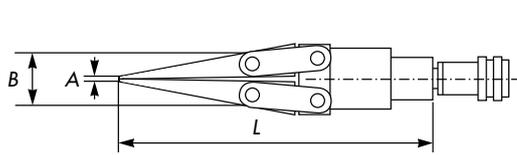

Spreading

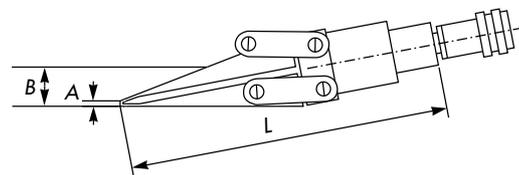

Lifting

▼ 10TS

15TLS ▼



▲ 10TL