


■ Model SRS-WS, SRS-WM i SRS-WN

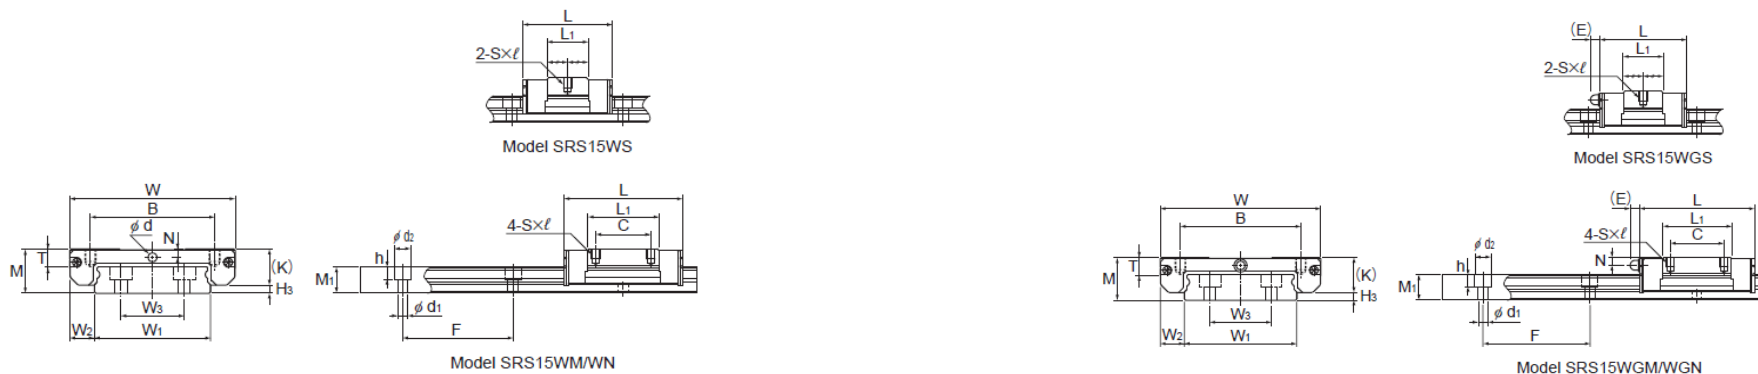


Unit: mm

Model No.	Outer dimensions			LM block dimensions										LM rail dimensions						Basic load rating		Static permissible moment N-m*					Mass				
	Height M	Width W	Length L	B	C	S×ℓ	L ₁	T	K	N	E	Greasing hole d	Grease nipple	H _s	Width W ₁	W ₂	W ₃	Height M ₁	Pitch F	d ₁ ×d ₂ ×h	Length* Max	C kN	C ₀ kN	M _A		M _B		M _C	LM block kg	LM rail kg/m	
																								1 block	Double blocks	1 block	Double blocks	1 block			
SRS 15WS SRS 15WGS	16	60	41.5	45	—	M4×4.5	24.9	6.5	13.3	3	—	3	—	PB107	2.7	42 ⁰ -0.02	9	23	9.5	40	4.5×8×4.5	2000	6.64 5.59	5.94 6.78	25.4 29	158 178	25.4 29	158 178	123 140	0.087	2.87
SRS 15WM SRS 15WGM	16	60	55.5	45	20	M4×4.5	38.9	6.5	13.3	3	—	3	—	PB107	2.7	42 ⁰ -0.02	9	23	9.5	40	4.5×8×4.5	2000	9.12 7.43	8.55 8.59	51.2 52.7	290 293	51.2 293	290 293	176 178	0.13	2.87
SRS 15WN SRS 15WGN	16	60	74.5	45	35	M4×4.5	57.9	6.5	13.3	3	—	3	—	PB107	2.7	42 ⁰ -0.02	9	23	9.5	40	4.5×8×4.5	2000	12.4 9.87	12.1 15.3	106 133	532 671	106 133	532 671	250 317	0.201	2.87

Note) Since stainless steel is used in the LM block, LM rail and balls, these models are highly resistant to corrosion and environment. The SRS-G is equipped with uncaged, full-complement bearings. For the SRS15WS/WM/WN, if a grease nipple is required, please specify upon ordering. Using a greasing hole other than for greasing may cause damage.

Note) The maximum length under "Length * " indicates the standard maximum length of an LM rail. (See ■1-160.) Static Permissible Moment *1 block: static permissible moment value with 1 LM block Double blocks: static permissible moment value with 2 blocks closely contacting with each other

Model number coding

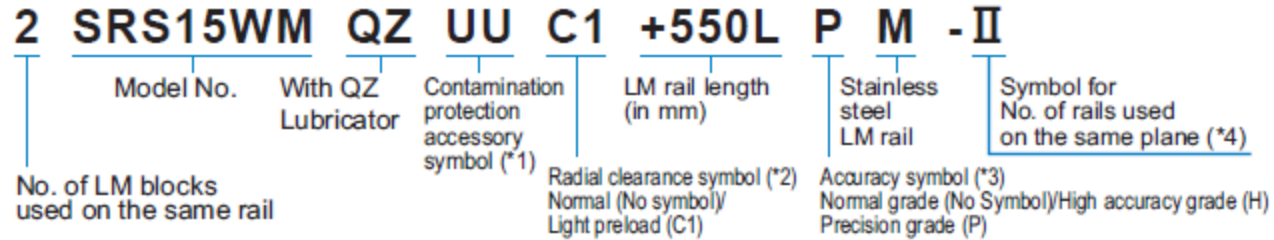

(*1) See contamination protection accessory on **A1-494**. (*2) See **A1-70**. (*3) See **A1-82**. (*4) See **A1-13**.

Note) This model number indicates that a single-rail unit constitutes one set. (i.e., required number of sets when 2 rails are used in parallel is 2 at a minimum.) Those models equipped with QZ Lubricator cannot have a grease nipple. When desiring a grease nipple for a model attached with QZ, contact THK.